

## *HDPE Hollow Wall Spiral Pipe-Specifications*


Size	Code	ID mm±3%	OD mm±3%	Length m	Fitting Code
3"	SPC-75 SPO-75 SPD-75	75	92	5	SPF75
4"	SPC-100 SPO-100 SPD-100	100	120	5	SPF100
6"	SPC-150 SPO-150 SPD-150	150	173	5	SPF150
8"	SPC-200 SPO-200 SPD-200	200	234	5	SPF200
10"	SPC-250 SPO-250 SPD-250	250	285	5	SPF250
12"	SPC-300 SPO-300 SPD-300	300	340	5	SPF300
16"	SPC-400 SPO-400 SPD-400	400	450	5	SPF400
20"	SPC-500 SPO-500 SPD-500	500	566	5	SPF500
24"	SPC-600 SPO-600 SPD-600	600	676	5	SPF600
32"	SPC-800 SPO-800 SPD-800	800	903	5	SPF800
40"	SPC-1000 SPO-1000 SPD-1000	1000	1030	5	SPF1000



SPC : Full-circle nonporous





SPO : Full-circle with hole



SPD : 2/3 Holes in the circumference

### Pipe Structure :

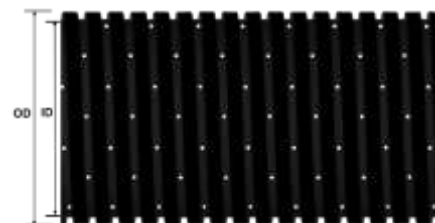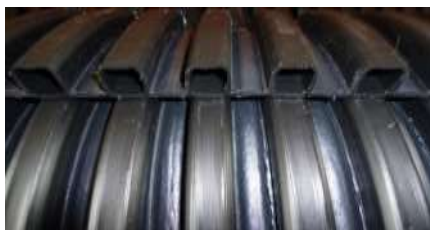Hollow Wall Spiral Pipe is double-wall HDPE pipe with smooth inside pipe wall. It is durable, light, high pressure-resistant, easy to install.




### Pipe Connection :



Direct Fitting



1. Align pipes and connector






2. Screw connector into the pipe






3. Screw another pipe into connector

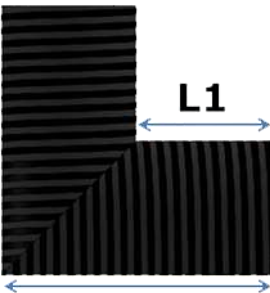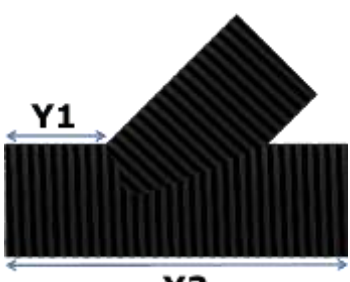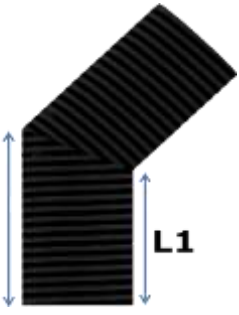**HDPE Hollow Wall Spiral Pipe  
Special-shaped connector specification**

 <p align="center"><b>L-Connector</b></p>			 <p align="center"><b>Y-Connector</b></p>			 <p align="center"><b>L45°-Connector</b></p>		
<b>Code</b>	<b>L1</b> cm	<b>L2</b> cm	<b>Code</b>	<b>Y1</b> cm	<b>Y2</b> cm	<b>Code</b>	<b>L1</b> cm	<b>L2</b> cm
<b>SPC-75L</b>	9.3	18.5	<b>SPC-75Y</b>	9.3	31.7	<b>SPC-75L45</b>	9.3	13.1
<b>SPC-100L</b>	10.7	22.7	<b>SPC-100Y</b>	10.7	38.3	<b>SPC-100L45</b>	10.7	15.6
<b>SPC-150L</b>	12.0	29.3	<b>SPC-150Y</b>	12.0	48.5	<b>SPC-150L45</b>	12.0	19.2
<b>SPC-200L</b>	13.3	36.7	<b>SPC-200Y</b>	13.3	59.8	<b>SPC-200L45</b>	13.3	23.0
<b>SPC-250L</b>	14.7	43.2	<b>SPC-250Y</b>	14.7	69.6	<b>SPC-250L45</b>	14.7	26.5
<b>SPC-300L</b>	16.7	50.7	<b>SPC-300Y</b>	16.7	81.4	<b>SPC-300L45</b>	16.7	30.7
<b>SPC-400L</b>	20.0	65.0	<b>SPC-400Y</b>	20.0	103.6	<b>SPC-400L45</b>	20.0	38.6
<b>SPC-500L</b>	23.3	79.9	<b>SPC-500Y</b>	23.3	126.7	<b>SPC-500L45</b>	23.3	46.8
<b>SPC-600L</b>	26.7	94.3	<b>SPC-600Y</b>	26.7	148.9	<b>SPC-600L45</b>	26.7	54.7
<b>SPC-800L</b>	30.0	120.3	<b>SPC-800Y</b>	30.0	187.7	<b>SPC-800L45</b>	30.0	67.4
<b>SPC-1000L</b>	33.3	146.3	<b>SPC-1000Y</b>	33.3	226.4	<b>SPC-1000L45</b>	33.3	80.1

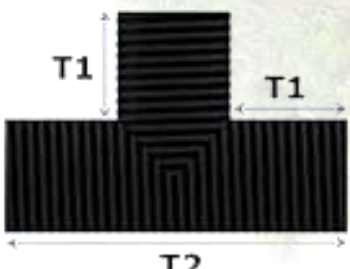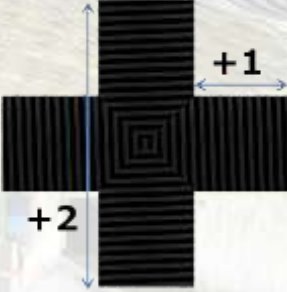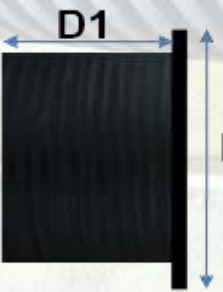 <p align="center"><b>T-Connector</b></p>			 <p align="center"><b>X-Connector</b></p>			 <p align="center"><b>D- plug specification</b></p>		
<b>Code</b>	<b>T1</b> cm	<b>T2</b> cm	<b>Code</b>	<b>+1</b> cm	<b>+2</b> cm	<b>Code</b>	<b>D1</b> cm	<b>D2</b> cm
<b>SPC-75T</b>	9.3	27.9	<b>SPC-75T</b>	9.3	27.9	<b>SPC-75D</b>	9.3	14.2
<b>SPC-100T</b>	10.7	33.3	<b>SPC-100x</b>	10.7	33.3	<b>SPC-100D</b>	10.7	17.0
<b>SPC-150T</b>	12.0	41.3	<b>SPC-150x</b>	12.0	41.3	<b>SPC-150D</b>	12.0	22.3
<b>SPC-200T</b>	13.3	50.1	<b>SPC-200x</b>	13.3	50.1	<b>SPC-200D</b>	13.3	28.4
<b>SPC-250T</b>	14.7	57.8	<b>SPC-250x</b>	14.7	57.8	<b>SPC-250D</b>	14.7	33.5
<b>SPC-300T</b>	16.7	67.3	<b>SPC-300x</b>	16.7	67.3	<b>SPC-300D</b>	16.7	39.0
<b>SPC-400T</b>	20.0	85.0	<b>SPC-400x</b>	20.0	85.0	<b>SPC-400D</b>	20.0	50.0
<b>SPC-500T</b>	23.3	103.3	<b>SPC-500x</b>	23.3	103.3	<b>SPC-500D</b>	23.3	61.6
<b>SPC-600T</b>	26.7	120.9	<b>SPC-600x</b>	26.7	120.9	<b>SPC-600D</b>	26.7	72.6
<b>SPC-800T</b>	30.0	150.3	<b>SPC-800x</b>	30.0	150.3	<b>SPC-800D</b>	30.0	95.3
<b>SPC-1000T</b>	33.3	179.7	<b>SPC-1000x</b>	33.3	179.7	<b>SPC-1000D</b>	33.3	118.0